


FLOOR PLANS OF RESIDENTIAL PROPERTIES IN THE DEVELOPMENT

發展項目的住宅物業的樓面平面圖

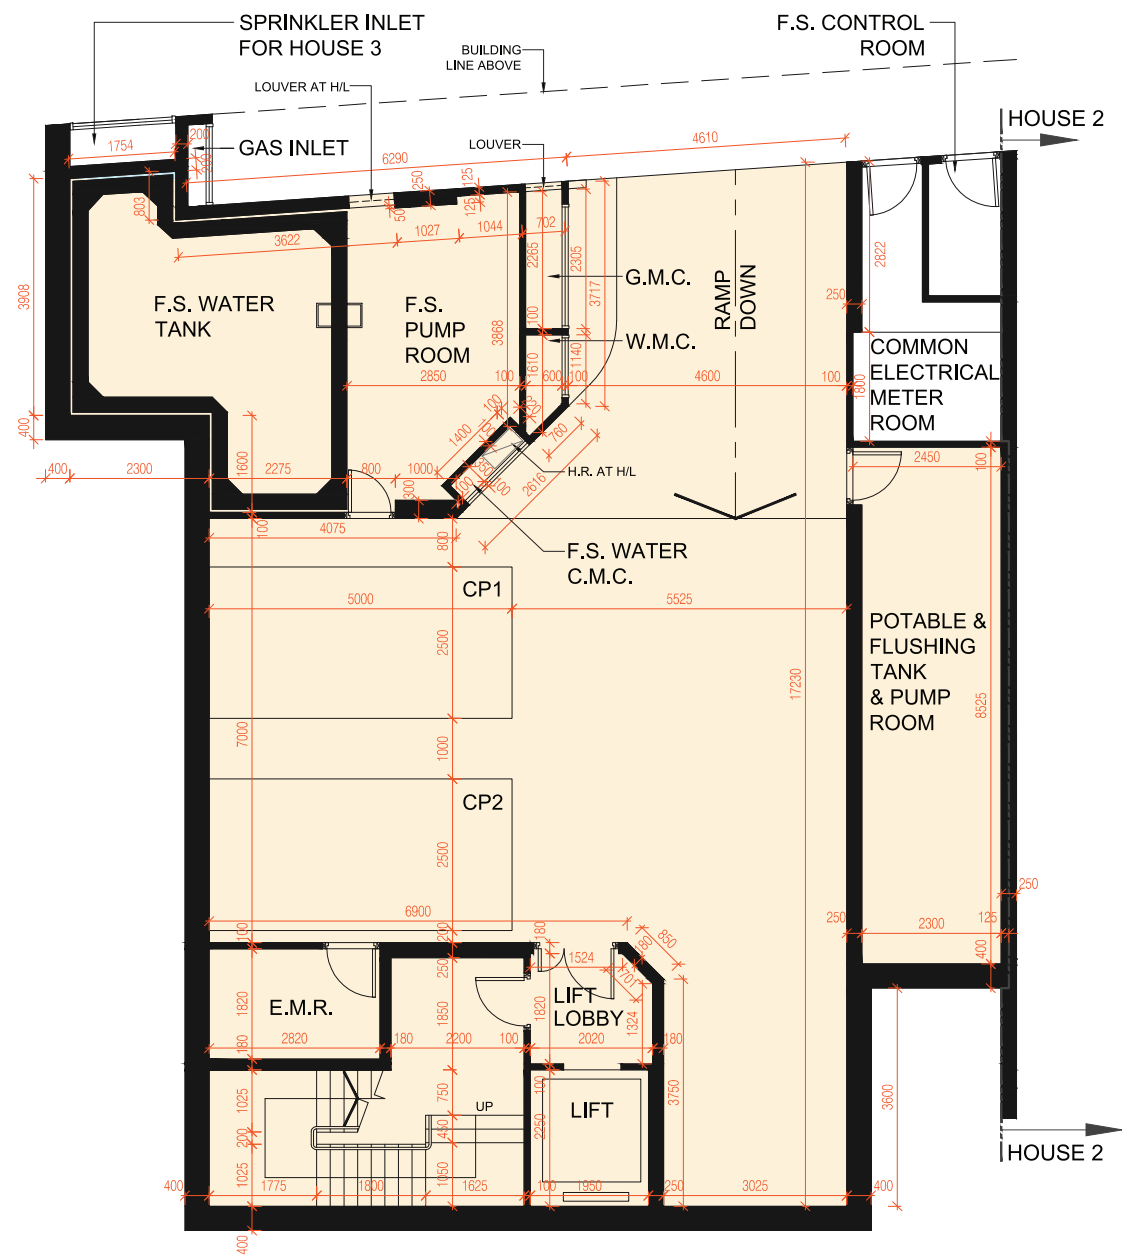

HOUSE 1

1號獨立屋

Floor-to-floor height of LG/F (mm): 3440/4300/4400/4450/4500/4650

Thickness of the floor slabs excluding plaster of LG/F (mm): 175/200

Floor-to-floor height refers to the height between the top surface of the structural slab of a floor and the top surface of the structural slab of its immediate upper floor

低層地下 – 層與層之間的高度(毫米)：3440/4300/4400/4450/4500/4650

低層地下 – 樓板(不包括灰泥)的厚度 (毫米)：175/200

層與層之間的高度指該樓層之石屎地台面與上一層石屎地台面之高度距離

The internal areas of the residential properties on the upper floors will generally be slightly larger than those on the lower floors because of the reducing thickness of the structural walls on the upper floors.

因住宅物業的較高樓層的結構牆的厚度遞減，較高樓層的內部面積，一般比較低樓層的內部面積稍大。



- Notes :
1. The dimensions in floor plans are all structural dimensions in millimeter.
 2. Please refer to page 20 of this sales brochure for the legends of the terms and abbreviations for the floor plans of residential properties.


- 備註：
1. 平面圖所列的數字為以毫米標示之建築結構尺寸。
 2. 請參閱本售樓說明書第20頁為住宅物業樓面平面圖而設之名詞及簡稱的圖例。

LOWER GROUND FLOOR PLAN

低層地下平面圖

FLOOR PLANS OF RESIDENTIAL PROPERTIES IN THE DEVELOPMENT

發展項目的住宅物業的樓面平面圖

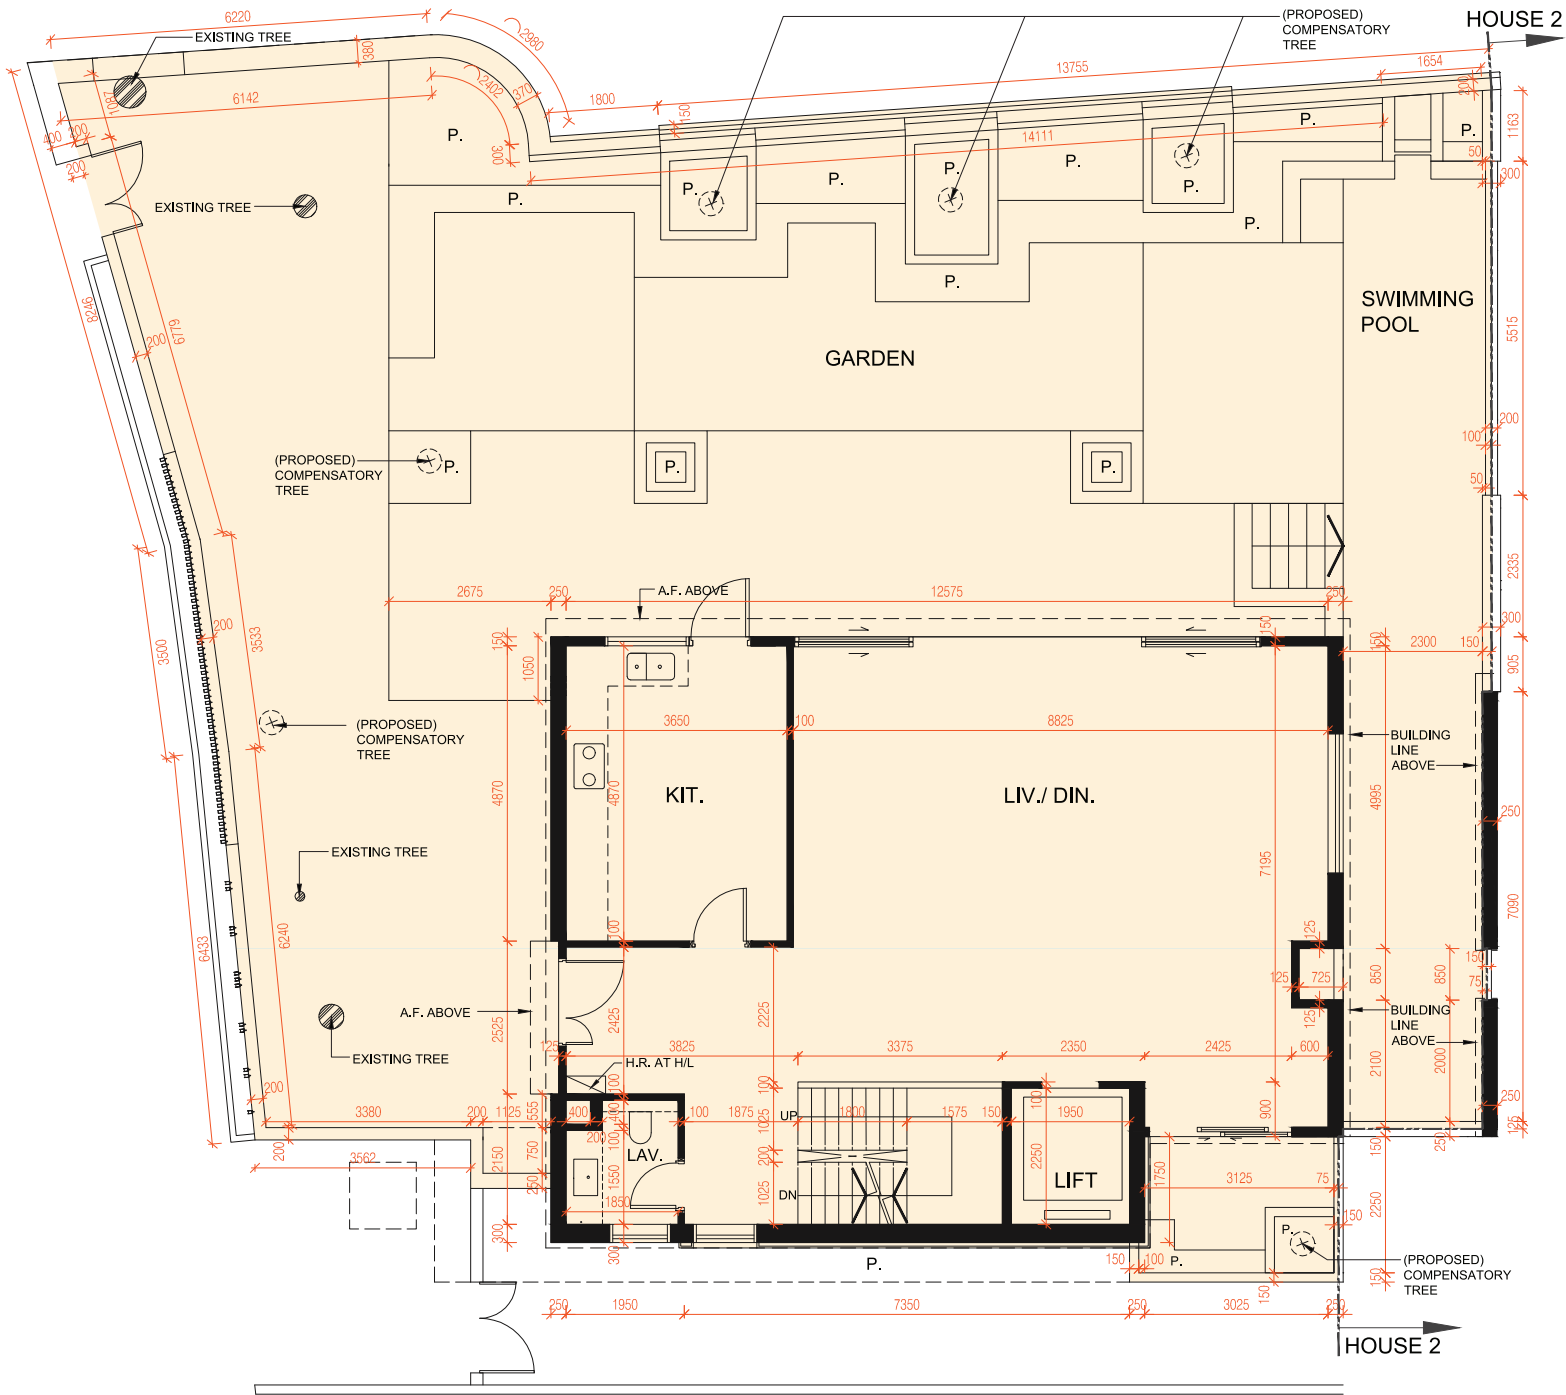

HOUSE 1

1號獨立屋

Floor-to-floor height of G/F (mm): 4500
Thickness of the floor slabs excluding plaster of G/F (mm): 150/175/250
Floor-to-floor height refers to the height between the top surface of the structural slab of a floor and the top surface of the structural slab of its immediate upper floor

地下 — 層與層之間的高度 (毫米) : 4500
地下 — 樓板(不包括灰泥)的厚度 (毫米) : 150/175/250
層與層之間的高度指該樓層之石屎地台面與上一層石屎地台面之高度距離

The internal areas of the residential properties on the upper floors will generally be slightly larger than those on the lower floors because of the reducing thickness of the structural walls on the upper floors.
因住宅物業的較高樓層的結構牆的厚度遞減，較高樓層的內部面積，一般比較低樓層的內部面積稍大。



- Notes :
- The dimensions in floor plans are all structural dimensions in millimeter.
 - Please refer to page 20 of this sales brochure for the legends of the terms and abbreviations for the floor plans of residential properties.

- 備註 :
- 平面圖所列的數字為以毫米標示之建築結構尺寸。
 - 請參閱本售樓說明書第20頁為住宅物業樓面平面圖而設之名詞及簡稱的圖例。


GROUND FLOOR PLAN

地下平面圖

FLOOR PLANS OF RESIDENTIAL PROPERTIES IN THE DEVELOPMENT

發展項目的住宅物業的樓面平面圖

FIRST FLOOR PLAN
1樓平面圖

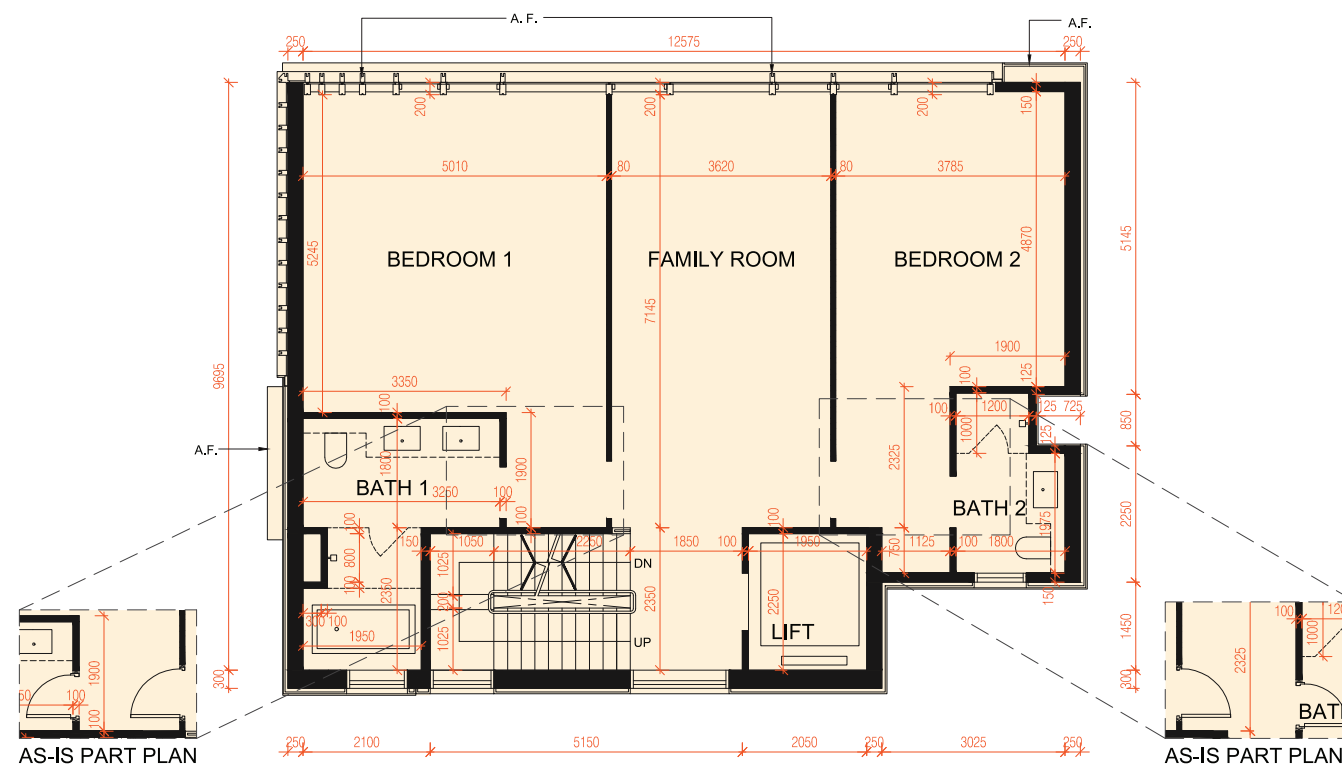

HOUSE 1 1號獨立屋

Floor-to-floor height of 1/F (mm): 3500

Floor-to-floor height of 2/F (mm): 3500

Thickness of the floor slabs excluding plaster of 1/F & 2/F (mm): 150/175/250

Floor-to-floor height refers to the height between the top surface of the structural slab of a floor and the top surface of the structural slab of its immediate upper floor

1樓 — 層與層之間的高度 (毫米) : 3500

2樓 — 層與層之間的高度 (毫米) : 3500


1樓及2樓 — 樓板(不包括灰泥)的厚度 (毫米) : 150/175/250

層與層之間的高度指該樓層之石屎地台面與上一層石屎地台面之高度距離

The internal areas of the residential properties on the upper floors will generally be slightly larger than those on the lower floors because of the reducing thickness of the structural walls on the upper floors.

因住宅物業的較高樓層的結構牆的厚度遞減，較高樓層的內部面積，一般比較低樓層的內部面積稍大。

SECOND FLOOR PLAN
2樓平面圖

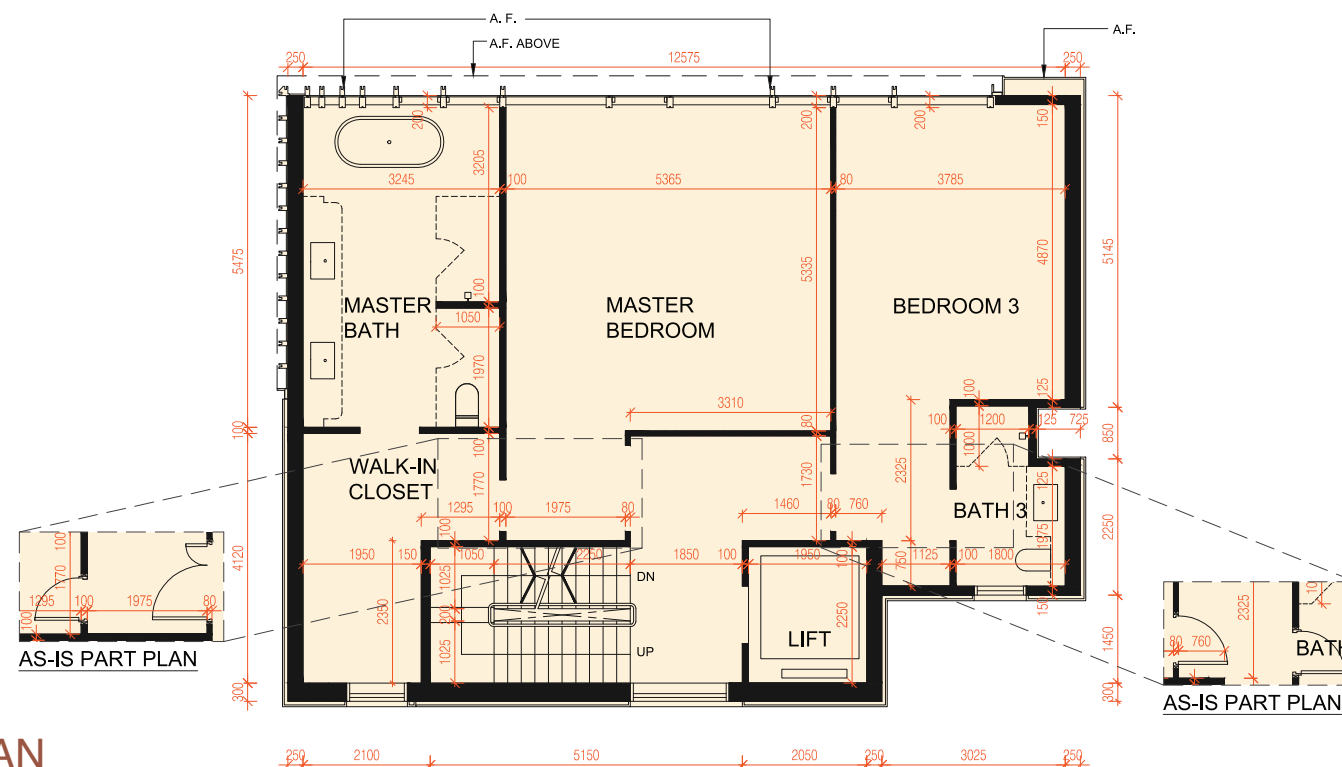

0 10 METRES(米)

SCALE 比例

Notes :

1. The dimensions in floor plans are all structural dimensions in millimeter.
2. Please refer to page 20 of this sales brochure for the legends of the terms and abbreviations for the floor plans of residential properties.

備註：

1. 平面圖所列的數字為以毫米標示之建築結構尺寸。
2. 請參閱本售樓說明書第20頁為住宅物業樓面平面圖而設之名詞及簡稱的圖例。

